

AC SERIES


500 Vpp to 4,000 Vpp Available




AC-20 – 1.5 WATT

The AC Series high voltage power supplies are a line of DC to AC converters. They provide isolated outputs of up to 4kVpeak-peak and 5 Watts in power (depending on model). The output voltage of the AC power supply is directly proportional to the input DC voltage. The output waveform is a quasi-sinewave. The two output leads are floating and fully isolated from the input power leads by over 1T Ohm (@ 25° C) with less than 50 pF of coupling capacitance. This permits the AC unit to be floated upon a DC potential with isolation up to 5kVDC. All AC's are reverse input voltage and short circuit protected.

CONNECTION DIAGRAM


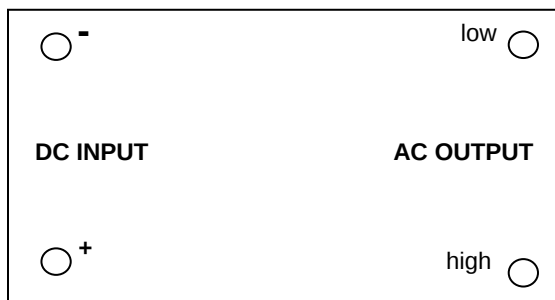


BOTTOM VIEW

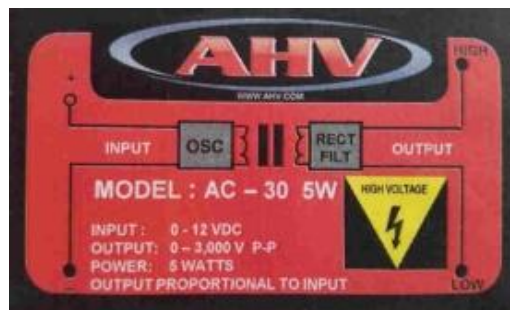

TOP VIEW

AC Series Performance Charts

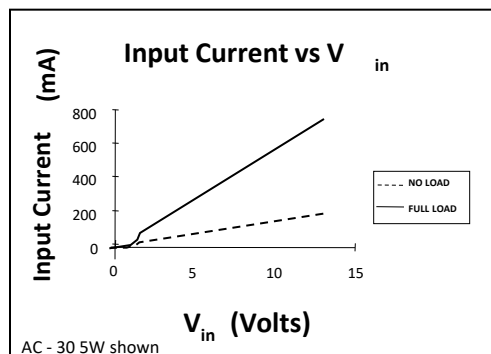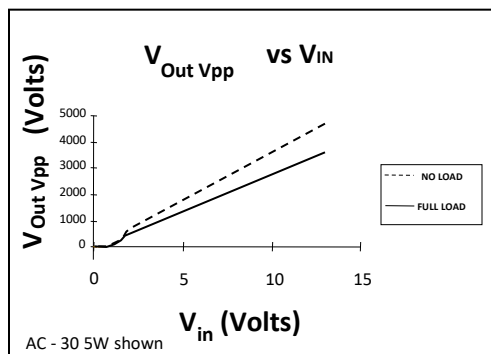

- **Output proportional to Input**
- **Encapsulated**
- **1.5, 3, and 5 Watt power levels available**
- **Various input voltages available**

TYPICAL APPLICATIONS

The AC Series high voltage power supplies are driven by an input voltage of 2 to 12 VDC. The input current and output voltage as a function of input is shown in the above graphs. There are NO internal connections between the input and output pins. As can be seen from the above, the output voltage is approximately linear with respect to input except near the lower input voltage region. Here, the output drops off rapidly as the input voltage approaches zero with the absolute maximum input voltage needed for reliable starting being 0.9 VDC. As shown in The input AC bypass capacitor C1 is optional and is utilized to prevent switching spikes from riding back on the input power lines. Values of 0.1 uF to 10 uF are commonly used.



General Inquiries –
Phone: (775) 777-0992, ext. 22
Fax: (775) 777-3631
Email: sales@americanhighvoltage.com

www.americanhighvoltage.com
American High Voltage is an ISO 9001: 2015 registered company
RoHS Compliant

AC SERIES

AMERICAN HIGH VOLTAGE

500 Vpp to 4,000 Vpp Available

ELECTRICAL CHARACTERISTICS (at 25° C unless otherwise specified)

Parameter	Conditions	Value			Units
		Min	Typical	Max	
Supply Voltage*	(all power models)	2	12	18	VDC
Input Current	No load (3W models)	90	100	125	mA
	No load (5W models)	160	190	190	mA
	Full load (3W models)	400	420	440	mA
	Full load (5W models)	600	650	750	mA
Output Waveform	No load (all models)		Trapezoidal		
	Full load (all models)		Trapezoidal		
Load Regulation	No load to full load	25%	25%	30%	V_{NL}/V_L
	Half load to full load	20%	20%	30%	V_{NL}/V_L
Output Linearity	No load		1%		$\frac{\Delta V_{out}}{\Delta V_{out} (ideal)}$
Output Linearity	Full load (all models)		1%		$\frac{\Delta V_{out}}{\Delta V_{out} (ideal)}$
Short Circuit Current			200	300	mA
Power Efficiency	Full load	60%	70%	75%	$\frac{P_{OUT}}{P_{IN}}$
Reverse Input Polarity	Protected to 20 VDC				
Temperature Drift	No load			1,000	ppm/Deg C
	Full load			1,000	ppm/Deg C
Thermal Rise	No load (case)			15	Degrees C
	Full load (case)			25	Degrees C
Slew Rate (10%-90%)	No load			10	mS
	Full load			12	mS
Slew Rate (90%-10%)	No load			20	mS
	Full load			10	mS
Drain Out Time	No load (5 TC)			1	mS



General Inquiries –
 Phone: (775) 777-0992, ext. 22
 Fax: (775) 777-3631
 Email: sales@americanhighvoltage.com

www.americanhighvoltage.com
 American High Voltage is an ISO 9001: 2015 registered company
 RoHS Compliant

AC SERIES

AMERICAN HIGH VOLTAGE

500 Vpp to 4,000 Vpp Available


Outline Drawing: Inches (millimeters)

ENVIRONMENTAL CHARACTERISTICS (at 25° C unless otherwise specified)


Parameters	Conditions	Value	Units
Temp. Range	Case Temp.	-40° to +71°	Celsius
	Case Temp.	-40° to + 160°	Fahrenheit
Shock	MIL-STD-810 Method 516	40 Gs	Proc IV
Altitude	Pins sealed against corona	-350 to +16,700	Meters
	Pins sealed against corona	-1,000 to +55,000	Feet
Vibrations	MIL-STD-810 Method 514	20 Gs	Curve E
Thermal Shock	MIL-STD-810 Method 504	-40°C to +71°C	Class 2

PHYSICAL CHARACTERISTICS (at 25° C unless otherwise specified)


Parameter	Conditions	Value	Units
Dimensions	MKS	38.1W x 63.5L x 19H	mm
	English	1.5"W x 2.5"L x 0.75"H	inches
Volume	MKS	46	cm ³
	English	2.8	inch ³
Mass	MKS	120	grams
	English	4.3	ounces
Packaging	Solid Epoxy Thermosetting		
Finish	Smooth Dial – Phthalate Case		
Terminations	Gold Plated Brass pins (4)	diameter: 0.040	inches
		diameter: 1.01	mm

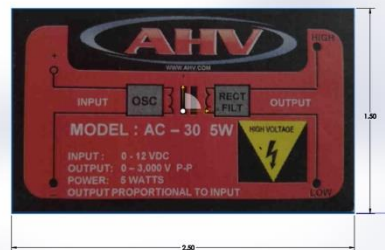


TOP VIEW

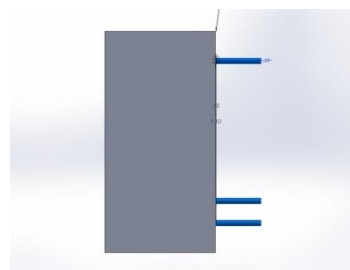

SIDE VIEW

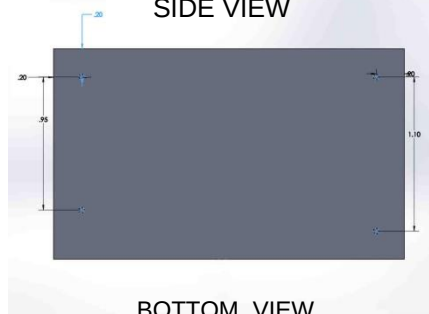

BOTTOM VIEW



RECOMMENDED SOLDER PAD DIMENSIONS



General Inquiries –
Phone: (775) 777-0992, ext. 22
Fax: (775) 777-3631
Email: sales@americanhighvoltage.com

www.americanhighvoltage.com
American High Voltage is an ISO 9001: 2015 registered company
RoHS Compliant

AC SERIES


AMERICAN HIGH VOLTAGE

500 Vpp to 4,000 Vpp Available

MODEL SELECTION TABLE

Model	Output Voltage	Power	Frequency
AC-10-1.5W	0-1,000 VDC	1.5 Watts	≈ 30 kHz
AC-10-3W	0-1,000 VDC	3 Watts	≈ 30 kHz
AC-10-5W	0-1,000VDC	5 Watts	≈ 30 kHz
AC-20-1.5W	0-2,000 VDC	1.5 Watts	≈ 30 kHz
AC-20-3W	0-2,000 VDC	3 Watts	≈ 30 kHz
AC-20-5W	0-2,000 VDC	5 Watts	≈ 30 kHz
AC-30-1.5W	0-3,000 VDC	1.5 Watts	≈ 30 kHz
AC-30-3W	0-3,000 VDC	3 Watts	≈ 30 kHz
AC-30-5W	0-3,000 VDC	5 Watts	≈ 30 kHz
AC-40-1.5W	0-4,000 VDC	1.5 Watts	≈ 30 kHz
AC-40-3W	0-4,000 VDC	3 Watts	≈ 30 kHz
AC-40-5W	0-4,000 VDC	5 Watts	≈ 30 kHz

Output Pin Description:

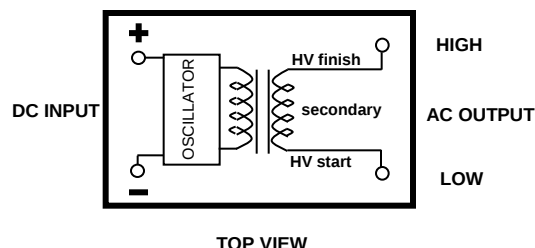

The AC series is characterized by having a floating output. This means that the output pins are not galvanically connected to the power input pins of the power supply. The actual isolation is over 1×10^{12} Ohms at room temperature. Coupling capacitance between the input and output is less than 50 pF.

If the AC module is to be utilized in a floating output configuration, it is important to connect the LOW pin to the point electrically closest to ground. For example, if the output of the AC unit is to be floated on a DC potential, connect the DC potential to the LOW pin. The LOW pin has the least dynamic coupling between the output and input. It is the start of the high voltage transformer secondary winding. The HIGH pin is the finish of the high voltage secondary winding. This is shown in Figure 4 above.

AC Series Waveform

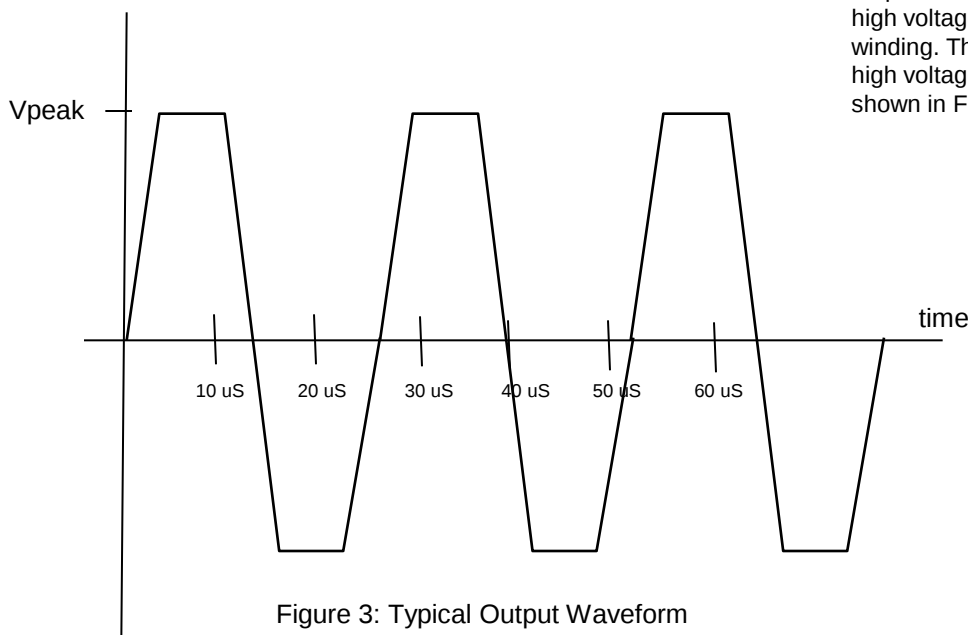



Figure 3: Typical Output Waveform

AC SERIES

500 Vpp to 4,000 Vpp Available

AC SERIES APPLICATION NOTES

The AC Series high voltage power supplies are driven by an input voltage of 2 to 12 VDC. The input current and output voltage as a function of input is shown in the above graphs. There are NO internal connections between the input and output pins. As can be seen from the above, the output voltage is approximately linear with respect to input except near the lower input voltage region. Here, the output drops off rapidly as the input voltage approaches zero with the absolute maximum input voltage needed for reliable starting being 0.9 VDC. As shown in Figure 1 below, the simple connection of a AC unit to a DC source of voltage will provide a high voltage AC output. The input AC bypass capacitor C1 is optional and is utilized to prevent switching spikes from riding back on the input power lines. Values of 0.1 μ F to 10 μ F are commonly used.

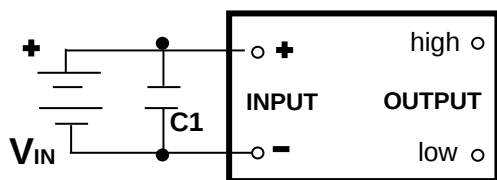


AC power supply

Basic AC hookup schematic (top view of AC shown)

AMERICAN HIGH VOLTAGE

The output voltage of the AC unit may be regulated by incorporating a simple op-amp circuit and linear control device such as an NPN transistor. To generate a feedback signal, the output voltage is rectified and compared against an external reference control voltage. For single supply operation, the circuit of Figure 2 may be used output regulation. A high voltage divider is made up of R5 and R6 to divide down the rectified output to a value comparable with the control voltage. The resistor R5 is value determined by power considerations. A good rule of thumb is a resistor that dissipates 10% of the full output power load. Too high a value may lead to output drift problems due to operational amplifier input bias current drift. The resistor R5 must be rated for the voltage that it is to step down. Simple high value carbon film resistors are usually avoided because their maximum voltage is limited to 300 VDC for 1 Watt devices. Precision metal film resistors are more stable but also have limiting maximum voltages. It is possible to series several metal film resistors to build up the voltage rating of R5. Capacitor C4 likewise must be rated for the proper voltage. It serves to provide a feed-forward pole in the feedback loop for stability. Capacitor C5, the ground mirror capacitor serves as a lower end of the AC divider formed with C4 and prevents excessive voltage from being fed to the operational amplifier in the case of a shorted output. R6 is selected by calculating the resistance divider ration with R5, providing a 5 volt feedback at full output voltage. The input reference bypass capacitor C1 is used to remove any noise feeding to the non-inverting signal pin of the operational amplifier. For maximum temperature stability, R1 should be identical in value to R6.

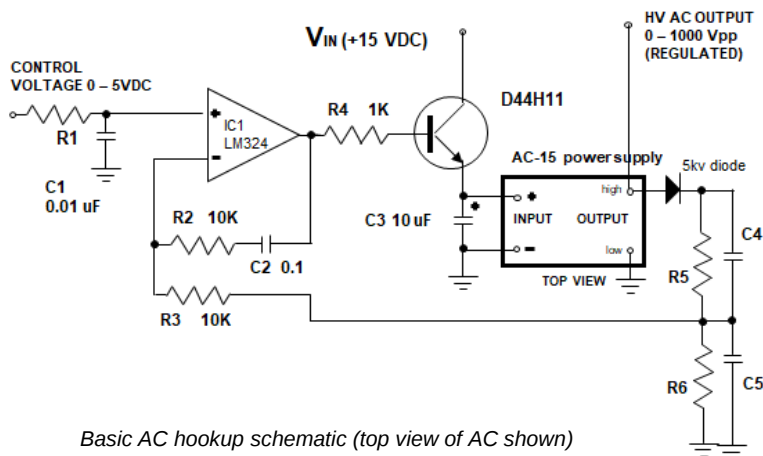

Basic AC hookup schematic (top view of AC shown)

AC SERIES

AMERICAN HIGH VOLTAGE

500 Vpp to 4,000 Vpp Available

Resistor R2 and capacitor C2 provide frequency compensation for the amplifier IC1 a common bipolar amplifier is used since its outputs and signal inputs can reach almost to ground. R3 provides protection to the signal inverting input of the opamp in case of a short circuit or arcing condition exists on the HV output. R4 protects the output of the opamp in case of a shorted NPN transistor. Typical values for an 1,000 volt peak-peak AC supply are as follows:


TC:	AC-15
R1:	62.9K Ohm
R5:	500 Kohms (Slimox 102 –Ohmite)
R6:	4.99 K Ohm 1%
C4:	2200 pF 3kV disc
C5:	0.1 uF 50 V ceramic
IC1:	LM324
Q1:	Power NPN such as D44H11, 2N3055 or equivalent
HV Diode:	5kV PIV fast recovery

Typical voltages seen during operation are as follows:

Voltage at junction of R5 and R6:	5V
Voltage at opamp output:	11.3V
Voltage into + supply AC:	10V (depends somewhat on output load)
Voltage of base of Q1:	10.7 V

The power supply feeding the opamp is not shown however it may be connected to the +15V supply and ground. It is a good idea to bypass the input power pins of the opamp with a 0.1 uF capacitor to reduce the EMI that may enter and damage the opamp especially during an output arcing condition. By varying the control voltage from 1 to 5V, the AC high voltage output of the AC power supply may be regulated. Line and load regulation as good as 0.01% are achievable depending upon physical layout and quality of feedback resistor.

Equivalent AC Circuit Model:

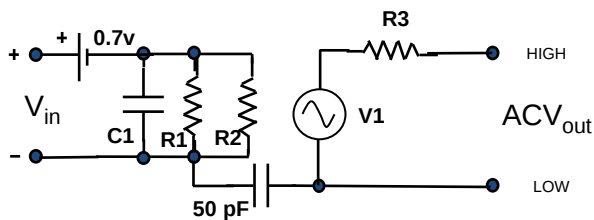

Equivalent AC HVPS Circuit Model

$$R1 = (13 \times P_{out_{max}}) \text{ Ohms}$$

$$R2 = (100 / P_{out}) \text{ Ohms}$$

$$R3 = (0.068 \times V_{out_{pp_{max}}} / I_{out_{pp_{max}}}) \text{ Ohms}$$

$$V1 = (VR2 \times V_{out_{max}} / 12) \text{ Volts}$$

$$C1 = 10 \text{ uF}$$

For example, for an AC-30 5W:

$$V_{out_{max}} = 3,000 \text{ VAC}$$

$$P_{out_{max}} = 5 \text{ W}$$

$$I_{out_{max}} = 0.0017 \text{ A}$$

$$R1 = 65 \text{ Ohms}$$

$$C1 = (10 \times 10^{-6}) \text{ Farads}$$

$$R2 = 20 \text{ Ohms}$$

$$R3 = 120K \text{ Ohms}$$